



MADE IN USA


Light Commercial Water Softeners



2 Tank Models

Features

- *Metered Electronic – Saves up to 50% salt & water usage by only regenerating when necessary*
- *The full 1.25" ported control valve design allows for the highest flow rates from a 1.25" water softener*
- *The electronic microprocessor keeps track of water used each day and adjusts itself to match your needs*

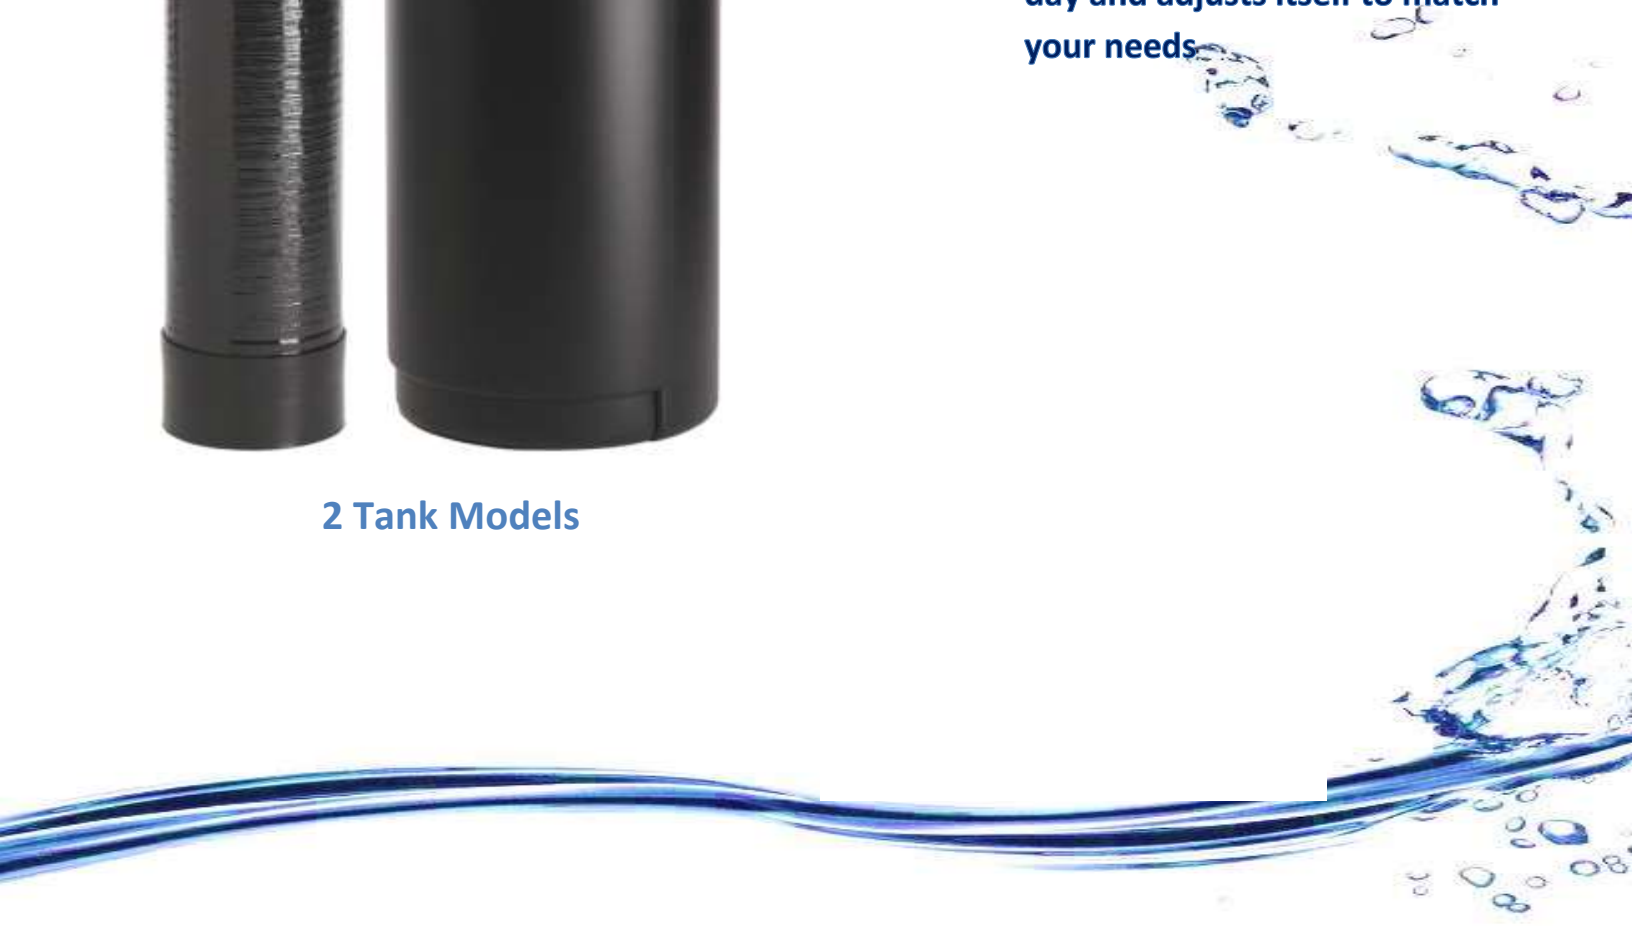



Softener Specifications

Light Commercial 1.25" Water Softeners

Model Number	ATWS300-ME-1.25	ATWS500-ME-1.25	ATWS700-ME-1.25
Softener Grain Capacity	90,000	150,000	210,000
Max. Hardness (gpg)	50	50	50
Max. Iron (clear - ppm)	2	2	2
Flow Rate @ 15 psid	21	32	41
Pipe Size	1.25" NPT	1.25" NPT	1.25" NPT
Water Pressure Limits	40 - 100 psi	40 - 100 psi	40 - 100 psi
Electrical	120 V. 60 Hz	120 V. 60 Hz	120 V. 60 Hz
Salt Used Per Regeneration	30 lbs.	50 lbs	70 lbs.
Salt Storage	300 lbs.	550 Lbs.	570 lbs.
Brine Tank Diameter	18"	24"	24"
Brine Tank Height	40"	41"	50"
Mineral Tank Diameter	14"	18"	21"
Mineral Tank Height	65"	65"	62"
Approx. Shipping Weight	90 lbs.	125 lbs	150 lbs

